

How to replace a fuel filter on Peugeot 407

Carry out replacement in the following order:




Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.

1



Open the hood

2.1

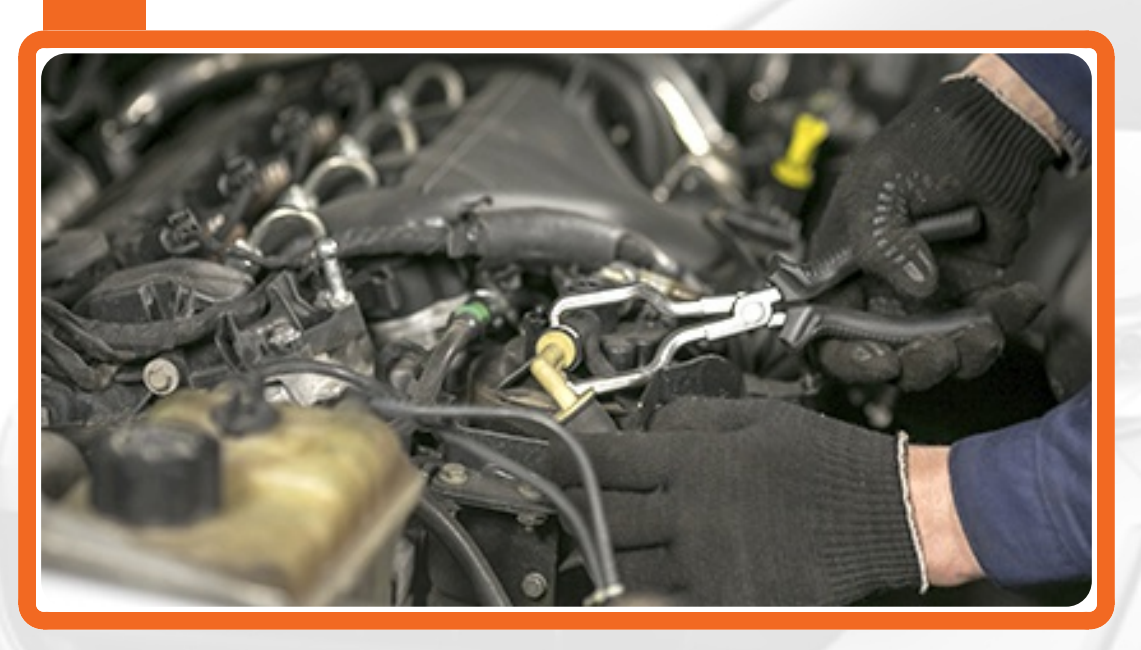


Disconnect the fuel supply lines from the fuel filter.


2.2




2.3

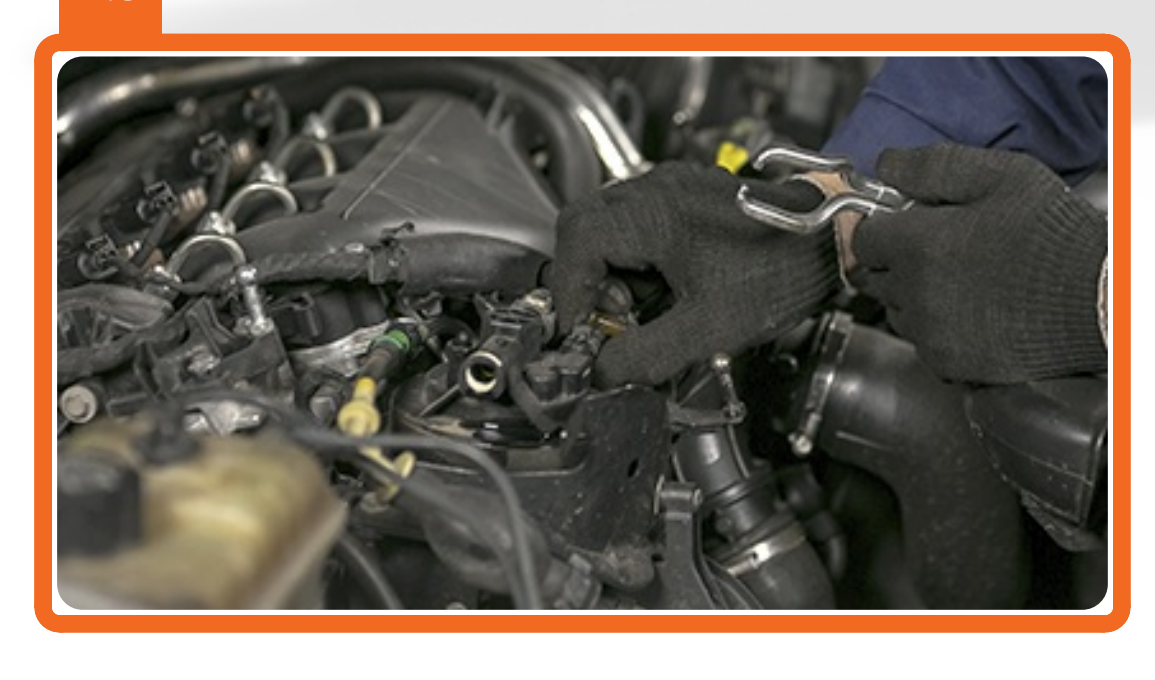

2.4

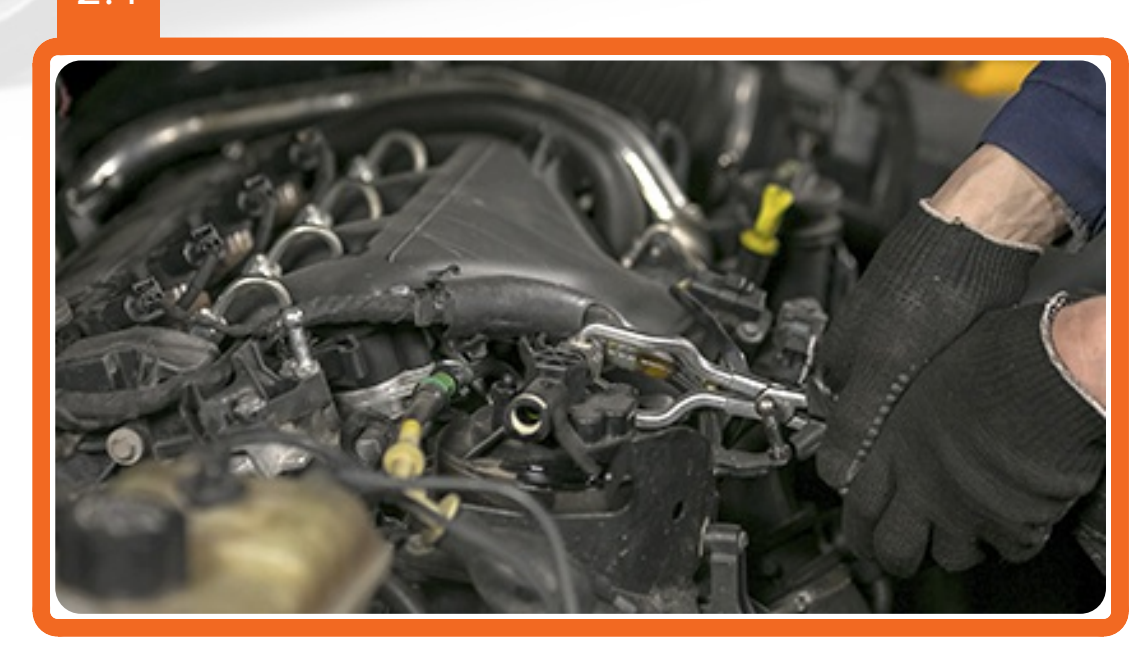


3.1

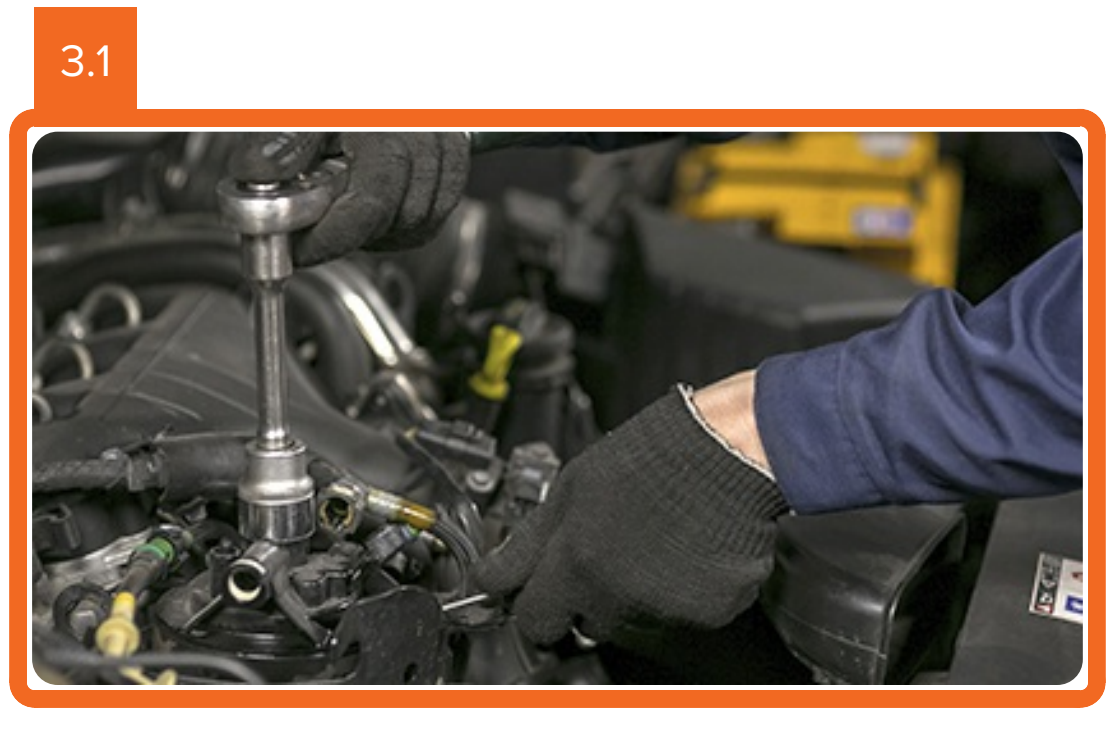

Unscrew the filter housing cap together with the old filter element.

3.2

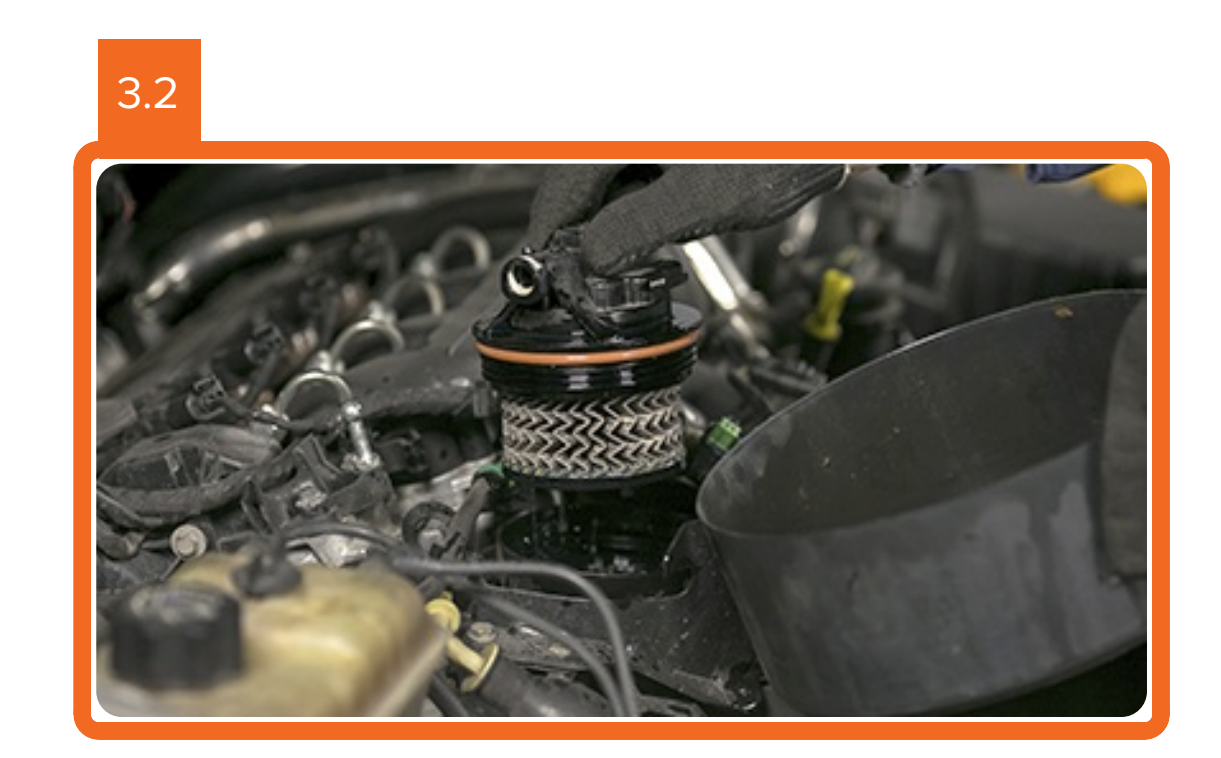

4.1




Remove the filter element from the filter housing

4.2




5.1

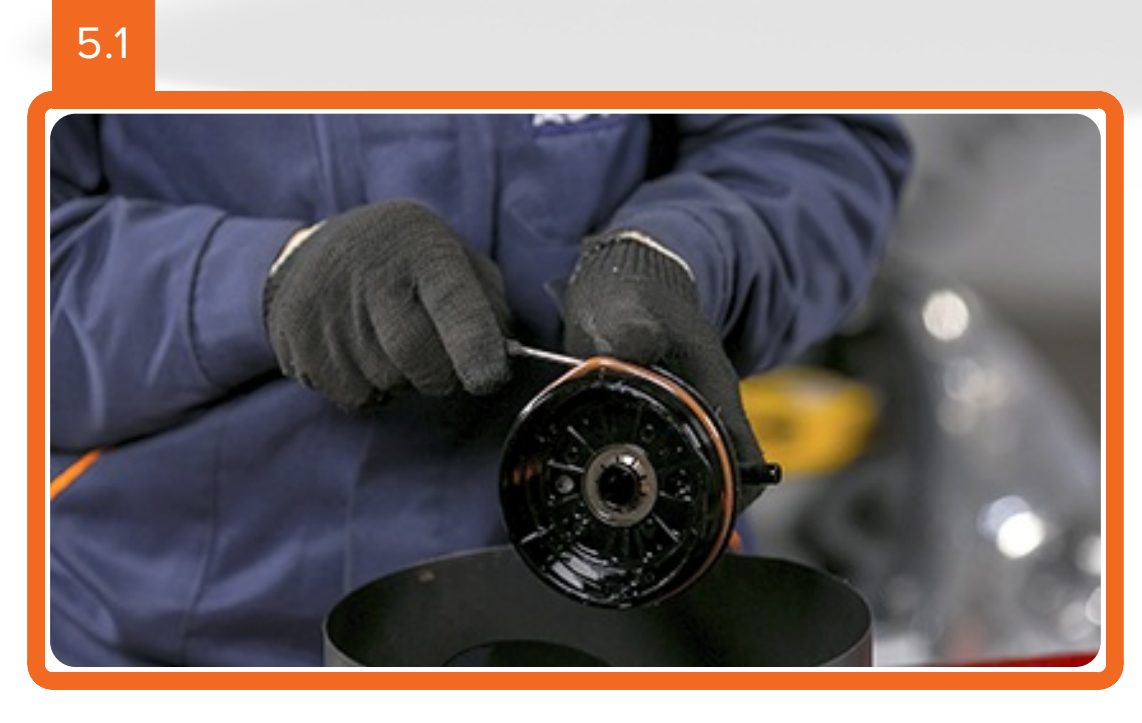


Remove the old sealing ring.

5.2

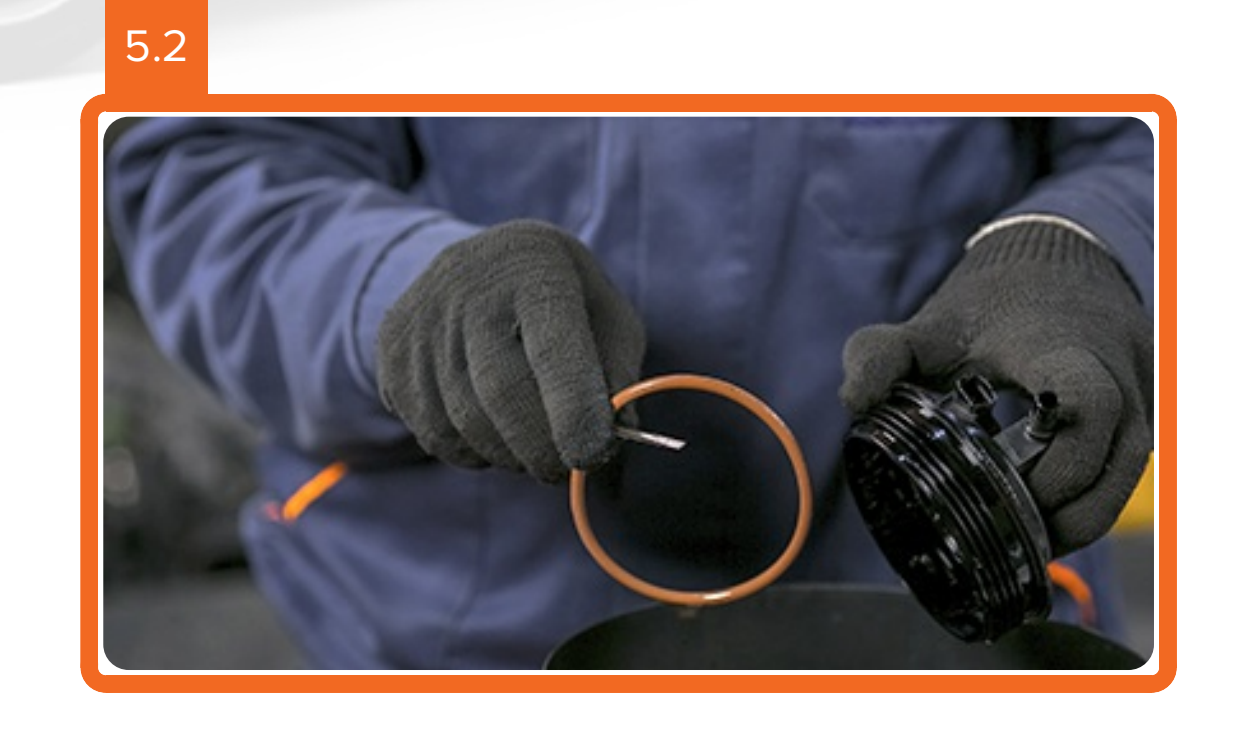


6

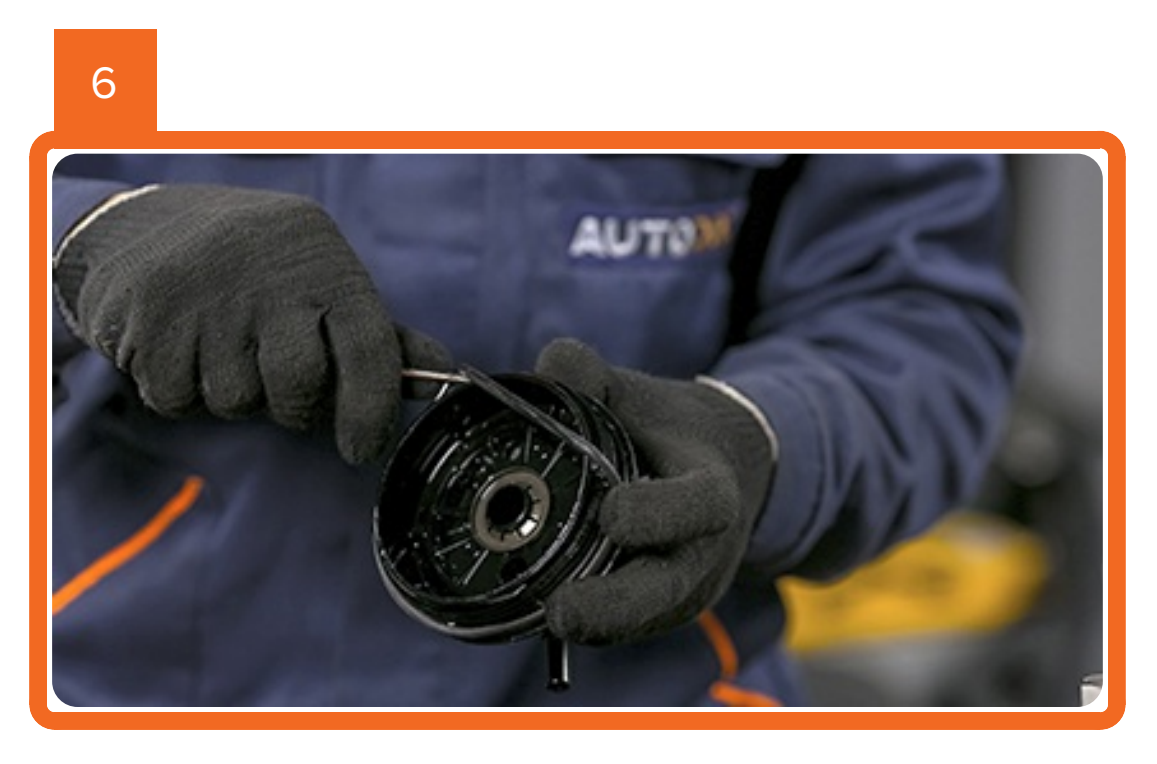


Install new O-rings of the filter element.

7.1

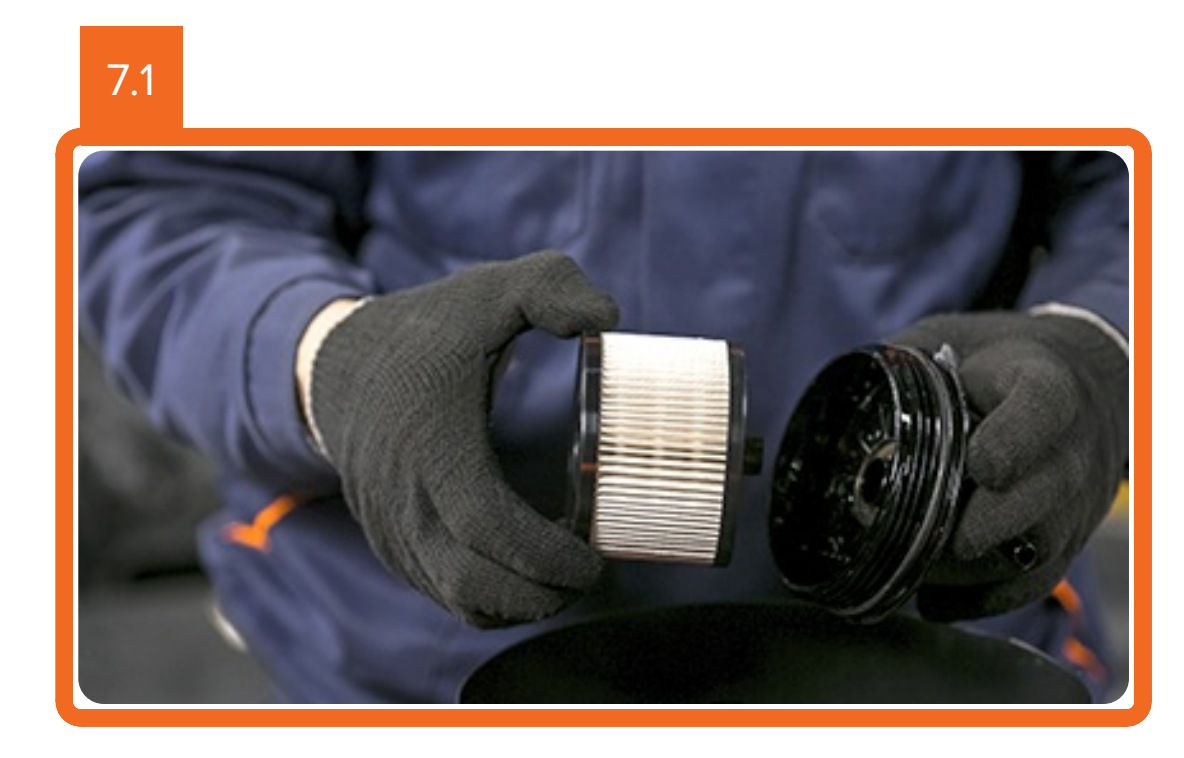


Insert a new filter element into the filter housing

7.2

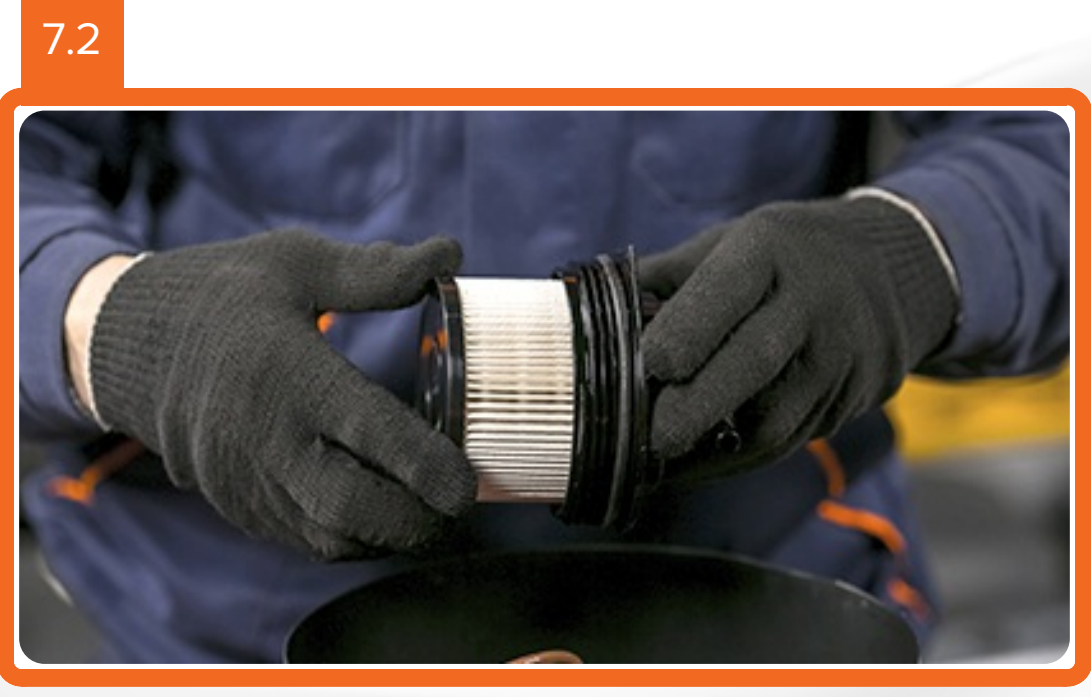




8.1

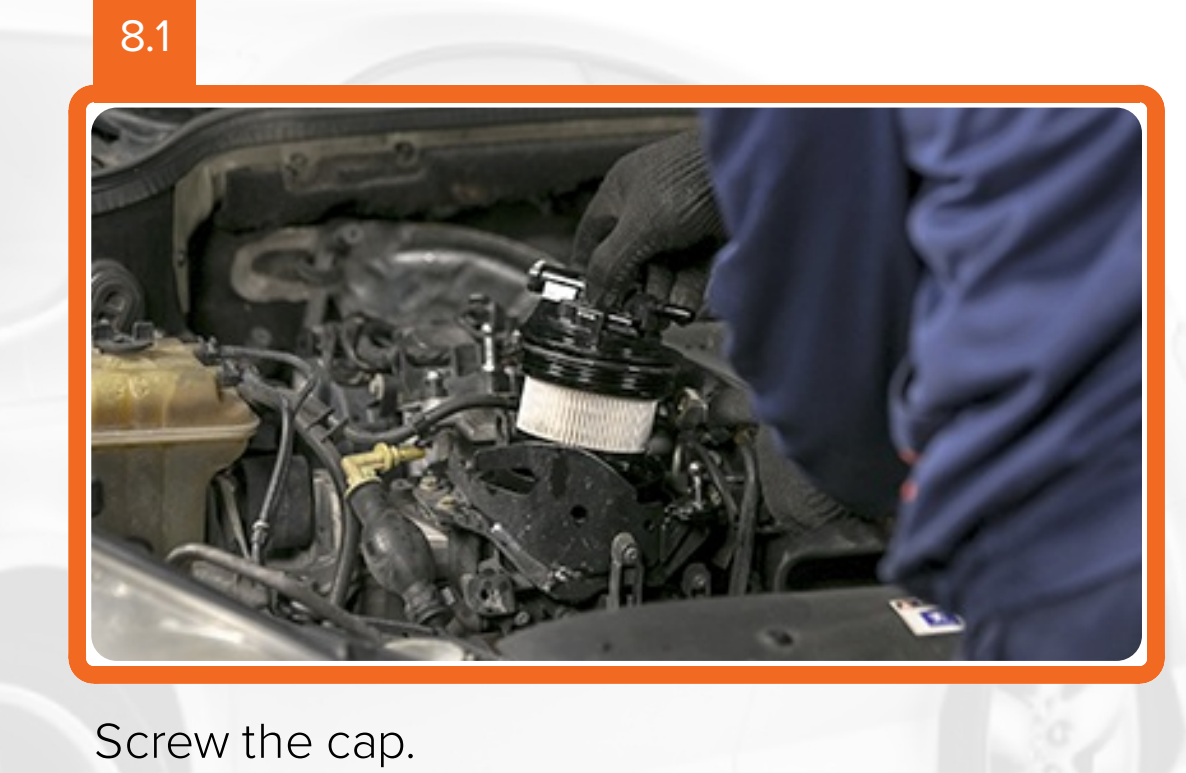


Screw the cap.



8.2

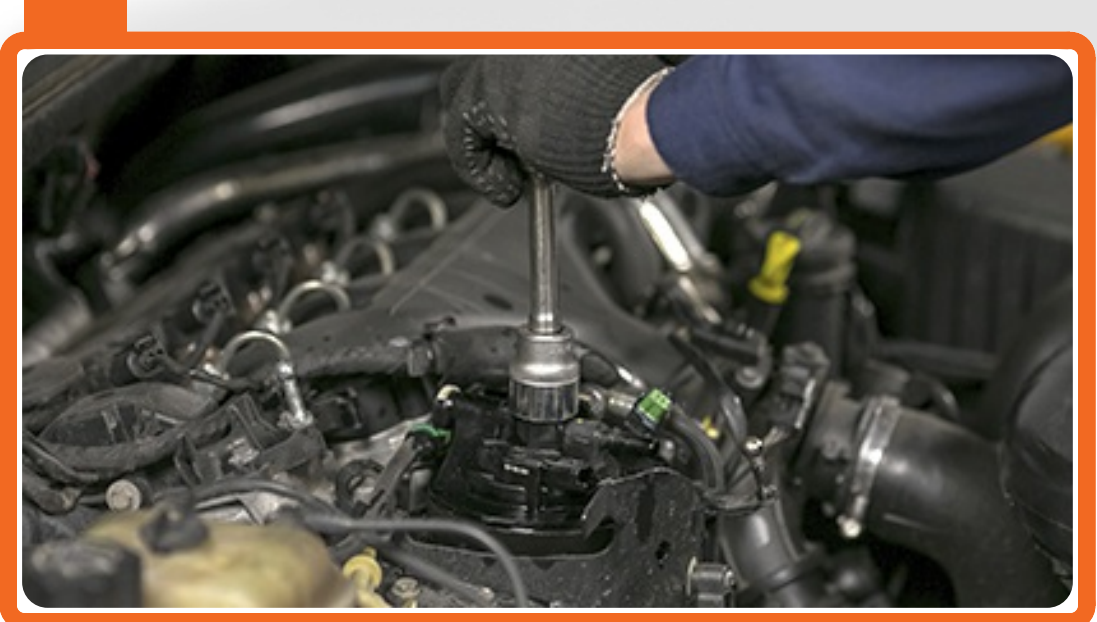


9.1

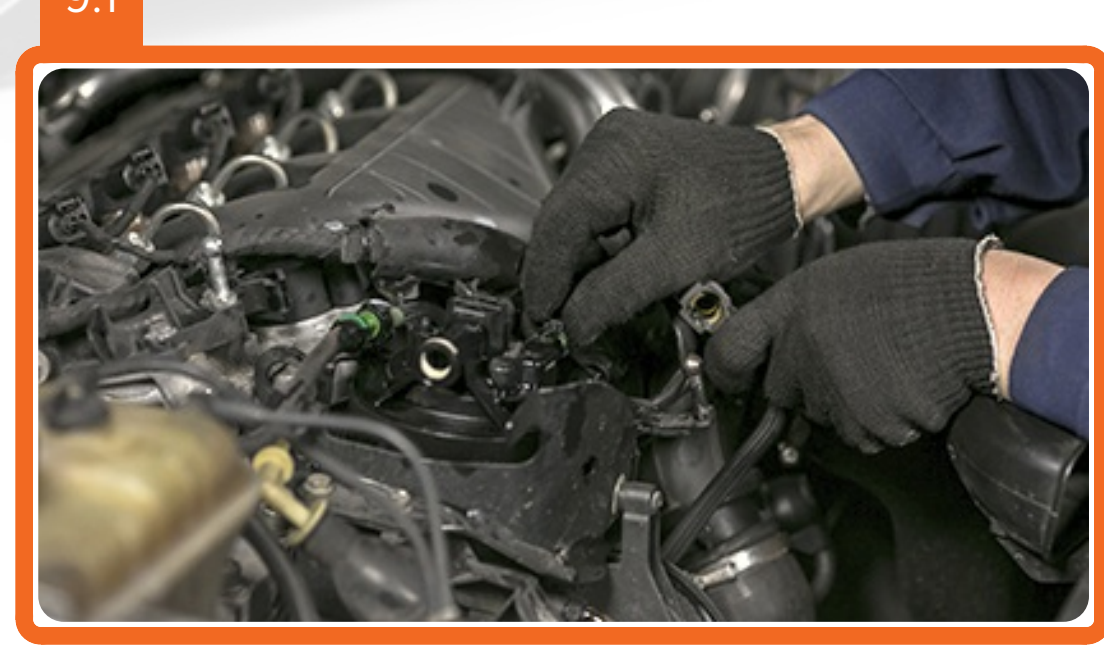


Connect the fuel supply lines to the fuel filter and tighten the fasteners.

9.2

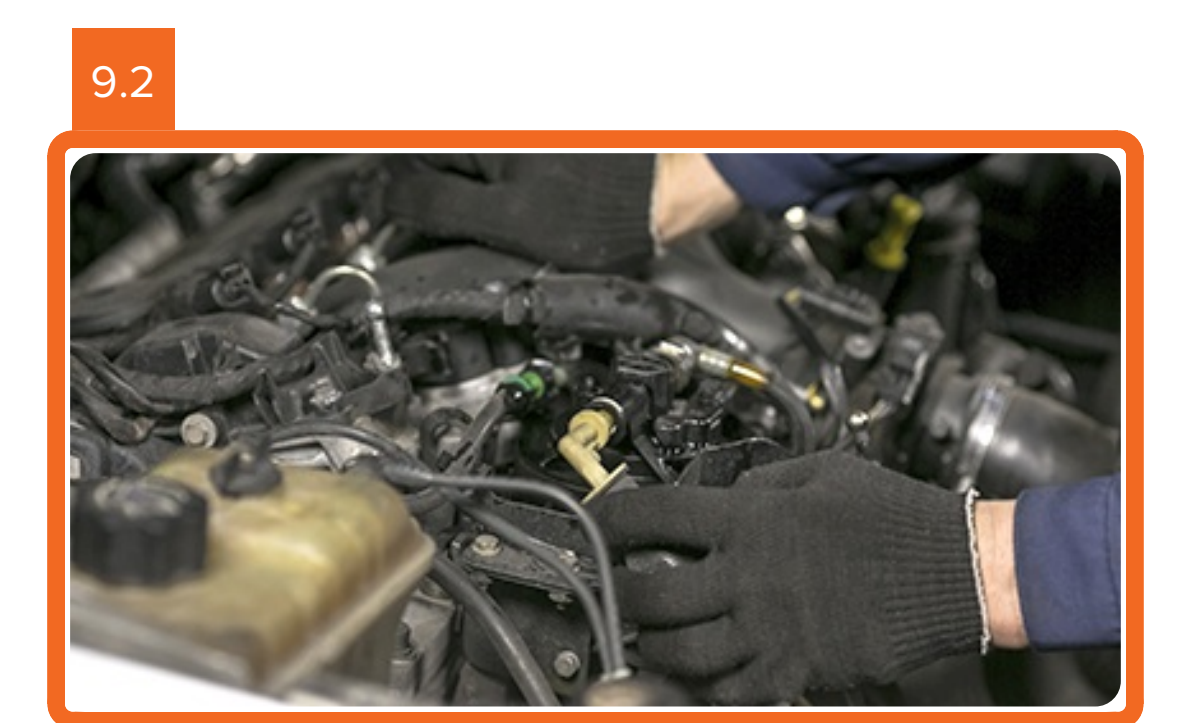

9.3

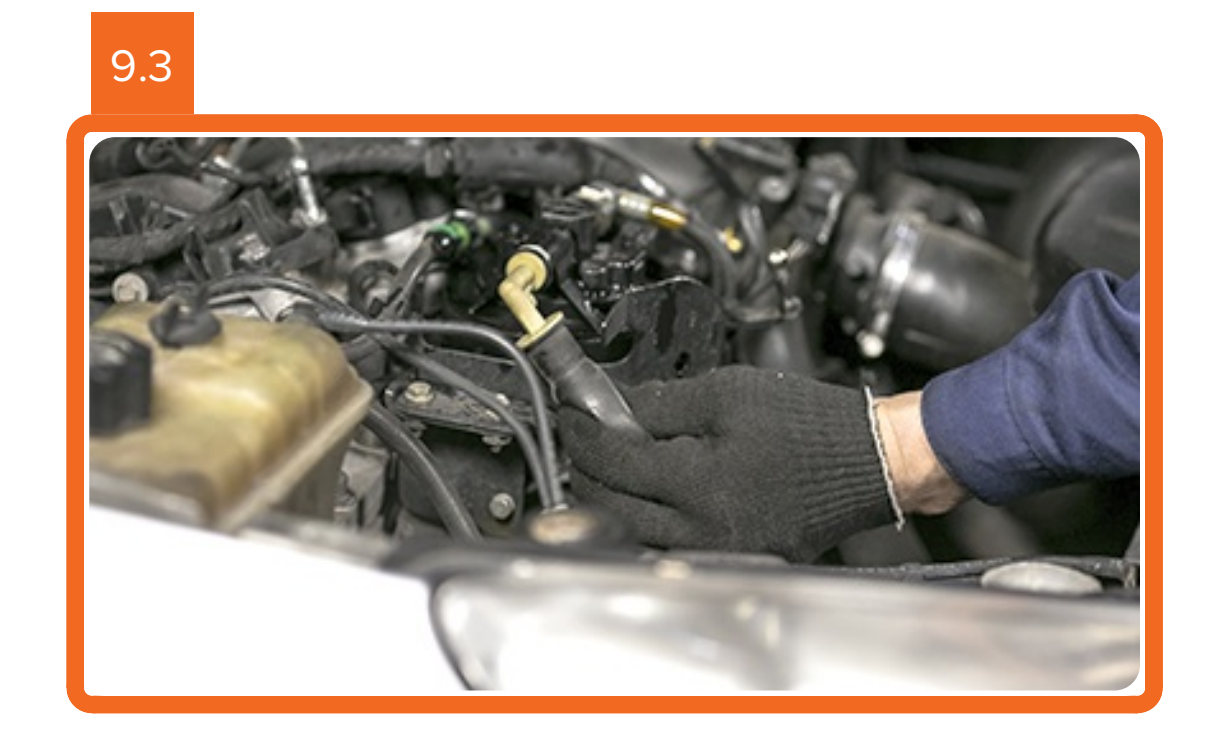

AutoDoc recommends:

Remember, it is important not to mix up the input and output of the filter. Arrows on the filter indicate the direction of fuel flow.

10



Close the hood

AutoDoc recommends:

Before the start be sure to bleed the fuel system to prevent the air inleakage.

We hope that this information have been useful for you!

Video tutorials

Watch our detailed video guides about your Peugeot 407 repair on our youtube channel. Watch video guides.



AutoDoc online

Highest quality fuel filters for your car Peugeot 407 are available on AutoDoc. Go to the website.

AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE


QUALITY AUTO PARTS



PEUGEOT




FUEL FILTERS

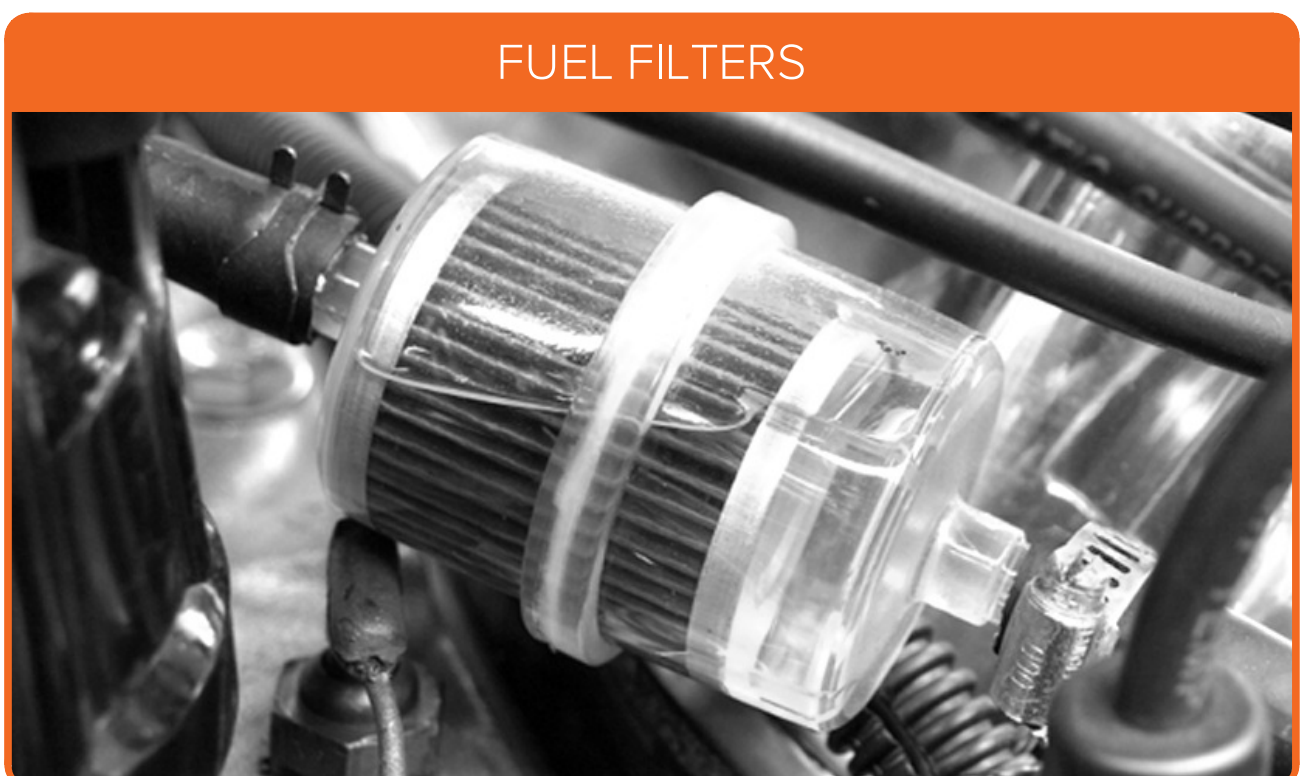


PEUGEOT 407



FUEL FILTERS FOR PEUGEOT

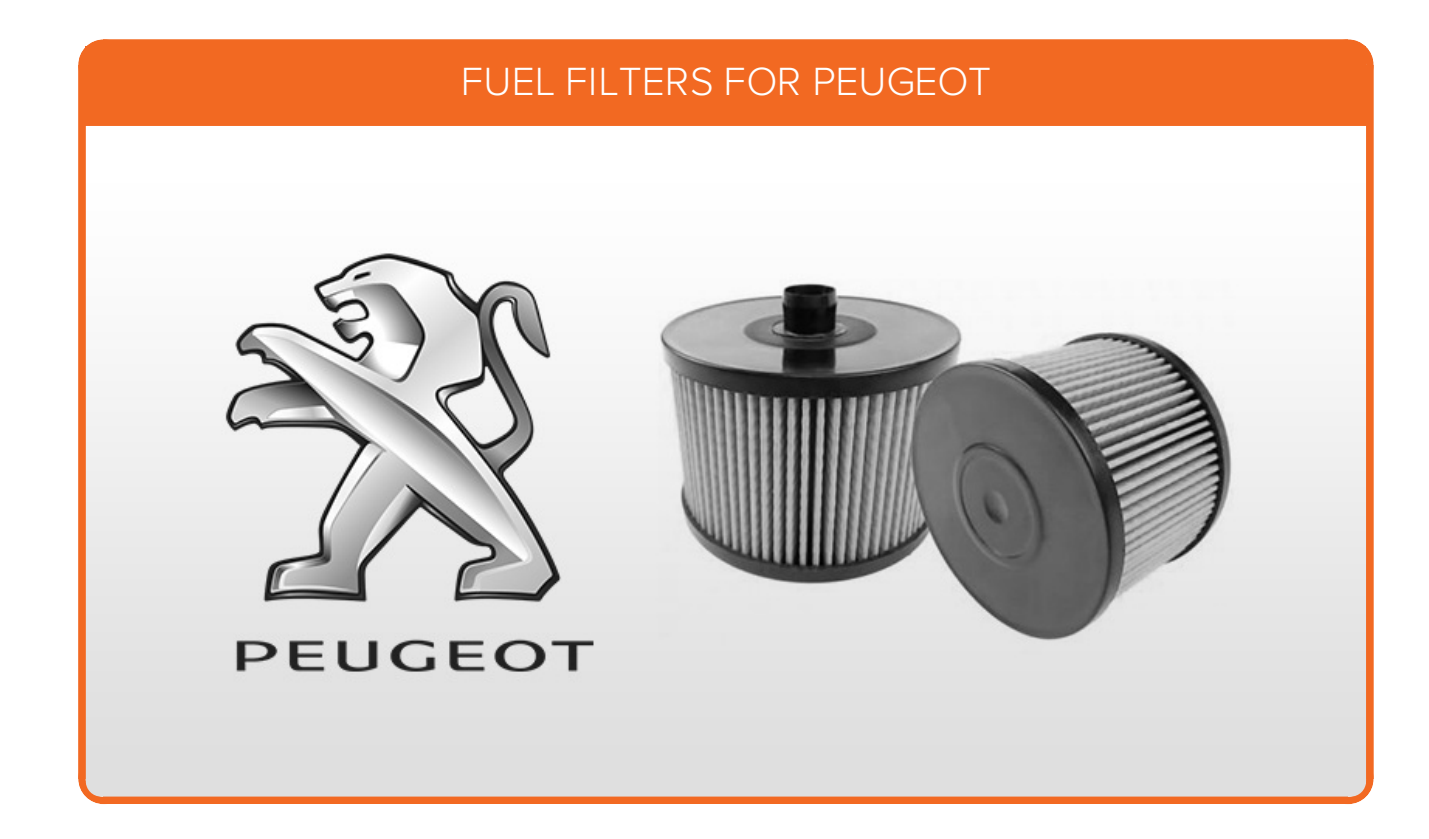

FUEL FILTERS FOR PEUGEOT 407

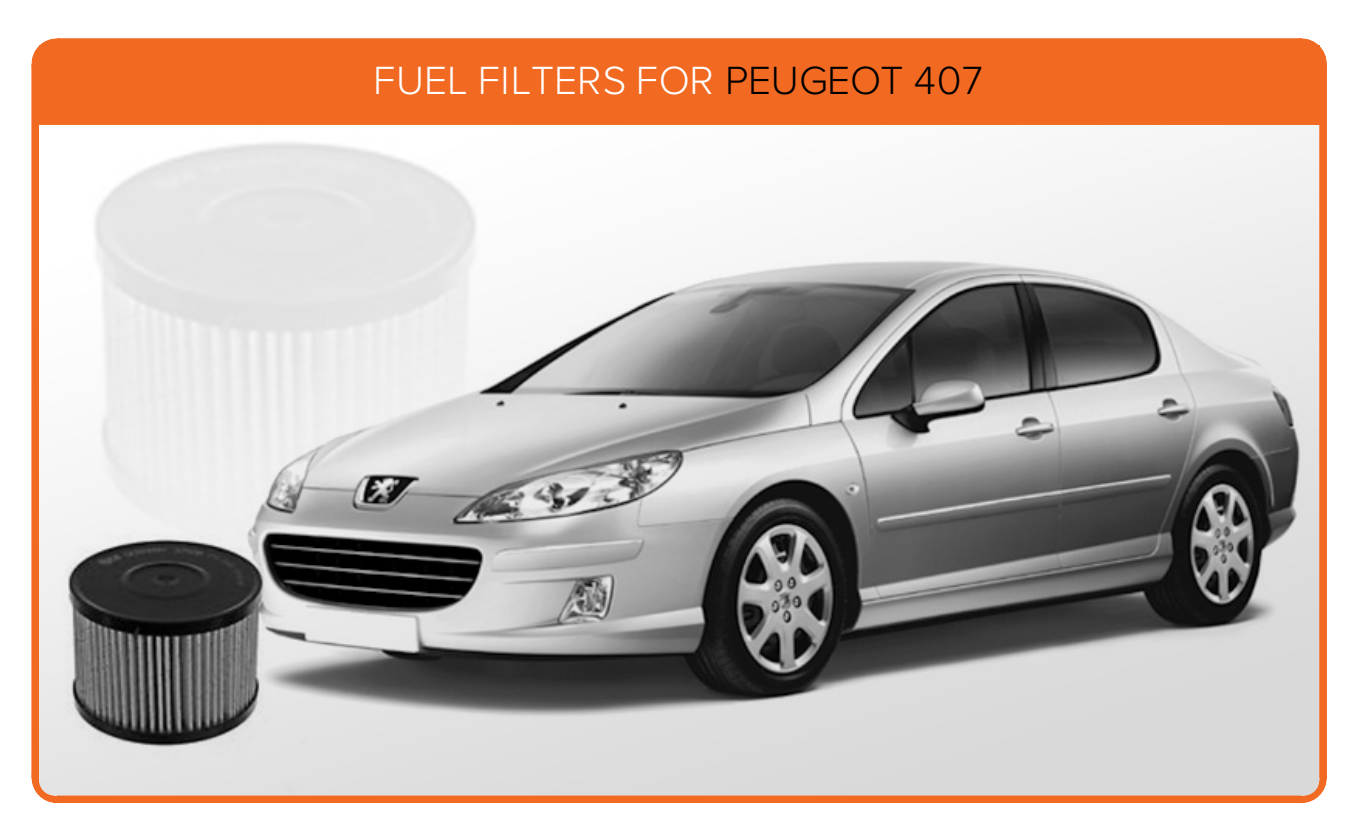

Disclaimer:

The document contains only general recommendations that may be useful for you when you perform repair or replacement works. AutoDoc shall not be liable for any loss, injury, damage of property, acquired in the repair or replacement process due to incorrect usage or misinterpretation of the provided information.

AutoDoc shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for informative purposes only and cannot replace advice from specialists.

AutoDoc shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AutoDoc strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.